

TRACK LIGHT

SPECIFICATION


Series	TL/S/4033
Input Voltage	220-240V
Color Temperature	3000K , 4000K
Housing Materials	Aluminium
Color	White , Black , Grey
Protection Class	IP 20




Remark *(All of Tolerances $\pm 10\%$)

Model	Rated Power (W)	CRI (Ra)	Efficacy (lm/W)	Beam Angle	Dimension $\varnothing \times H$ (mm)
TL/S/4033N	10	> 90	90	10°/15°/24°/ 36°/50°	58 x 130
TL/S/4034N	14	> 80	90	10°/15°/24°/ 36°/50°	66 x 145
TL/S/4035N	20	> 80	110	10°/15°/24°/ 36°/50°	73 x 155
TL/S/4036N	24	> 90	85	10°/15°/24°/ 36°/50°	80 x 185


Light Distribution Curve

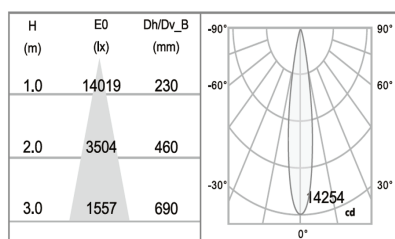

15°

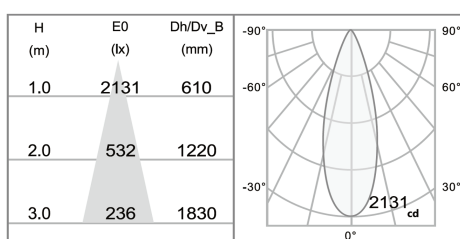


36°

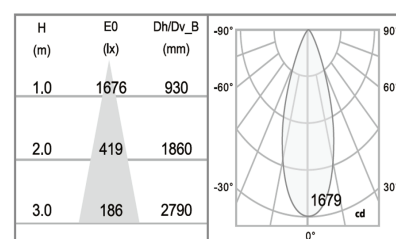

50°

Track System



CX-MA

Accessories




Honey comb



Barn door



Anti-glare ring

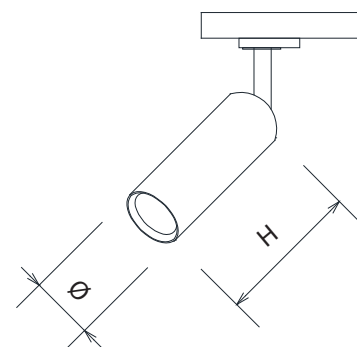

Dimension Drawing (mm)

