

# SURFACE DOWNLIGHT COB

## SPECIFICATION



Series	WDL7
Input Voltage	220-240Vdc , 50Hz
Color Temperature	3000K , 4000K , 5000K
CRI	≥ 90 Ra
Unified Glare Rating (UGR)	< 19
Housing Materials	Adjustable Aluminium
Color	White
Protection Class	IP 20
Controls	ON / OFF



Remark \*(All of Tolerances ± 10%)

Model	Rated Power (W)	Luminous Flux (lm)	Beam Angle	Dimension WxH (mm)
WDL7/70/9	9	630	15°/24°/36°	Ø 70 x 140
WDL7/100/18	18	1535	15°/24°/36°	Ø 100 x 170

### Light Distribution Curve

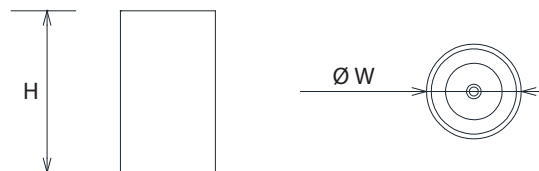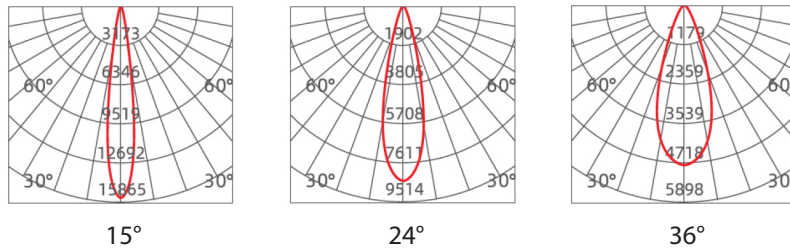

Dimension Drawing (mm)

