

WALL WASHER

SPECIFICATION

Series	WW/37S/W
Input Voltage	220-240Vac 50Hz , DC24V
Power Factor	> 0.9
Color Temperature	2700K , 3000K , 4000K , 5700K , RGB
CRI	70 Ra , 80 Ra , 90 Ra
Beam Angle	8° , 15° , 30° , 45° , 60° , 15*60° , 20*40°
Driver	Inventronics , Meanwell , Done , Moso or equivalent
LED Chip	Osram , Lumileds or equivalent
Housing Materials	Die-casting Aluminium with Tempered Glass Cover
Color	Silver
Operating Temperature	- 40°C to + 50°C
Protection Class	IP 66
Life Time	50000 Hrs
Surge Protection	4KV line-line 6KV line-earth
Controls	DMX512



Accessories (Option)





Anti-glare Baffle(Y) T-shape bracket L-shape bracket

Remark *(All of Tolerances $\pm 10\%$)

Model	Rated Power (W)	Efficacy (lm/W)	Dimension WxLxH (mm)	Weight (kg)
WW/37S/W	36 48	80 (WW , CW , DW) 30 (RGB) 35 (RGBW)	38 x 1000 x 84	2.4

Light Distribution Curve

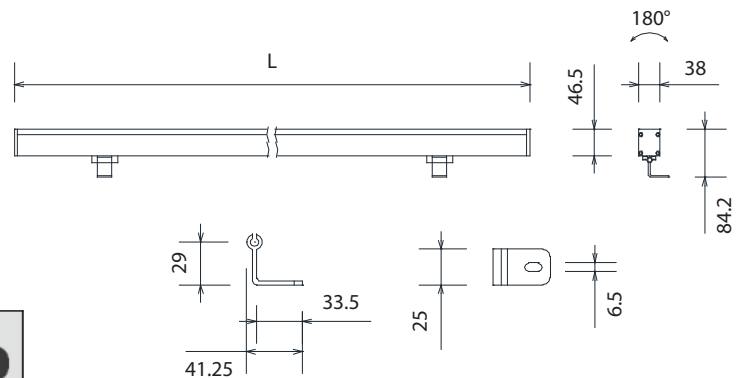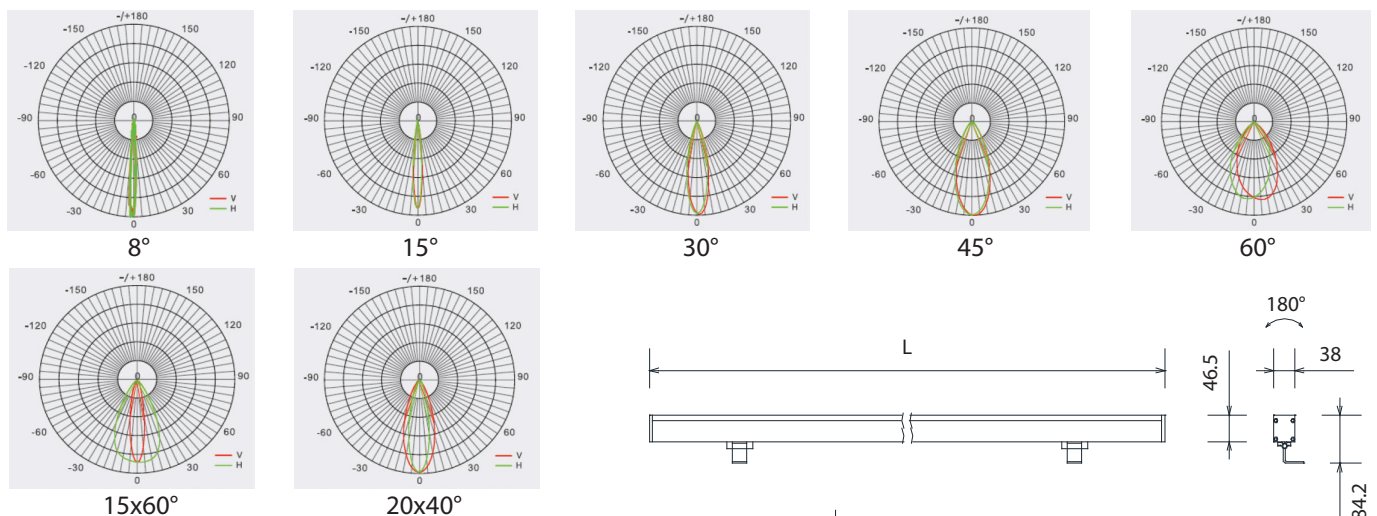

Dimension Drawing (mm)

